



DAV PUBLIC SCHOOL, MALIGHAT MUZAFFARPUR (BIHAR)

E-mail – prinmalighat@gmail.com

Website: www.davpsmalighat.com

Contact No. 9263182202, 0621-2283776

TENDER NOTICE

Tender No. : DAV/MGT/2026-27/01

Date: 07/06/2026

INVITATION OF SEALED TENDERS

01.	Name of work	Estimate of construction cost of shed in Rear side of D.A.V Public School, Kanhauli Malighat, Muzaffarpur.
02.	Total Length	3568.84 sq. ft.
03.	Date of Tender Notification	07/06/2026
04.	Last Date/Time for Receipt of Bids	Offline Mode:13-06-2026 upto05:00PM Online Mode:14-06-2026 upto04:00PM
05.	Name & Address of inviting Tender	DAV Public School, Malighat, Near BMP-06, Muzaffarpur,
06.	Time of Completion	Within 25 Days from the date of work order

Sealed tenders are hereby invited from eligible, experienced and financially sound contractors/vendors fulfilling the prescribed norms of DAV College Managing Committee (DAV CMC), New Delhi, for execution of the extension of construction/ renovation/ development work as approved by the competent authority.

The work shall be executed strictly in accordance with the approved architectural drawings, specifications, estimates, and other relevant documents provided by the Architect and approved by DAV CMC. The approved plan and estimate are enclosed herewith for ready reference of intending bidders.

➤ **Eligibility Criteria**

1. The bidder must possess valid registration as a contractor/vendor with appropriate statutory authorities.
2. The bidder should have adequate experience in executing similar civil construction works in educational institutions, government organizations, public sector undertakings, or reputed private organizations.
3. The bidder should possess valid GST Registration, PAN, and other statutory registrations as applicable.
4. The bidder must have sufficient technical manpower, equipment, and financial capability to complete the work within the stipulated timeline.
5. The bidder should not have been blacklisted by any Government Department, Autonomous Body, DAV Institution, or any other recognized authority.

➤ **Submission of Tender**

Interested contractors/vendors shall submit their sealed tenders containing the following documents:

- i. Detailed financial quotation.
- ii. Copy of GST Registration Certificate.
- iii. Copy of PAN Card.

- iv. Experience credentials and work completion certificates.
- v. Details of ongoing and completed projects.
- vi. Undertaking regarding adherence to specifications and timelines.
- vii. Any other relevant supporting documents.

➤ **Last Date and Mode of Submission**

The sealed tender should reach the undersigned latest by 13 June 2026 up to 4:00 PM through any of the following modes:

(A) Physical Submission

The Principal
DAV Public School, Malighat
Muzaffarpur, Bihar – 842001

OR

(B) Email Submission

Email: prinmalighat@gmail.com

Tenders received after the stipulated date and time shall not be considered.

➤ **Technical and Quality Requirements**

The selected contractor/vendor shall ensure that:

1. The contractor/vendor shall undertake the assigned construction/development work as per the approved drawings, specifications, quantities, and technical standards prescribed in the estimate and related documents.
2. Only standard quality materials conforming to BIS/ISI specifications and relevant building standards are used.
3. All materials shall be subject to inspection and approval by the Architect/School Management before use.
4. No substandard or unapproved material shall be utilized under any circumstances.
5. Workmanship shall conform to accepted engineering and construction practices.
6. Safety measures for labourers, students, staff members, and school property shall be ensured throughout the execution period.
7. The contractor shall comply with all applicable labour laws, environmental regulations, and statutory requirements.

➤ **Time Schedule**

1. The contractor shall clearly specify the completion timeline in the tender document.
2. The work shall commence immediately after issuance of the Work Order.
3. The contractor shall maintain the agreed schedule and complete the work within the stipulated period.
4. Any delay attributable to the contractor may attract penalties as deemed appropriate by the School Management.

➤ **General Terms and Conditions**

1. The School Management reserves the right to accept or reject any or all tenders without assigning any reason whatsoever.
2. The lowest quotation shall not necessarily be accepted.
3. The School Management may negotiate with any bidder if considered necessary.
4. The successful bidder shall execute the work strictly as per approved plans, specifications, and instructions issued by the Architect and School Management.
5. Measurements and quality certification by the Architect/authorized engineer shall be binding for payment purposes.
6. Payment shall be released on satisfactory progress and certification of work completed.

7. Any deviation from approved specifications without prior written approval shall make the contractor liable for rectification at his own cost.
8. The contractor shall be responsible for maintaining cleanliness and proper disposal of construction debris.
9. The contractor shall be solely responsible for any accident, injury, or damage occurring during the execution of the work.
10. The decision of the School Management and DAV CMC, wherever applicable, shall be final and binding in all matters relating to the tender and execution of work.


➤ **Opening of Tenders**


The tenders received within the stipulated time shall be scrutinized by the Tender Committee constituted by the School Management. The School reserves the right to seek clarifications and supporting documents from any bidder before finalization.

For any clarification regarding the tender, interested parties may contact the undersigned during working hours.

MEMBER OF BUILDING SUB- COMMITTEE

1. Dr. K.C. Satapathy, Chairman, DAV PS, Malighat, Muzaffarpur, Bihar.
2. Shri S.K. Jha, Manager, DAV PS, Malighat, Muzaffarpur, Bihar.
3. Shri A.C. Jha, ARO, DAV PS, Malighat, Muzaffarpur, Bihar.
4. Dr. Himanshu Kumar Pandey, Principal, DAV PS, Malighat, Muzaffarpur, Bihar.
5. Mr. R.C. Sharma, Principal, DAV PS, Bakhari, Darbhanga Road, Muzaffarpur.
6. Mr. Murai Pathak, Headmaster, DAV PS, Narhan, East Champaran.
7. Mr. B.K. Singh, Civil Engineer.
8. Senior Teacher, DAV PS, Malighat, Muzaffarpur, Bihar.


(Dr. Himanshu Kumar Pandey)
Principal
Principal
D.A.V. Public School
Malighat, Muzaffarpur

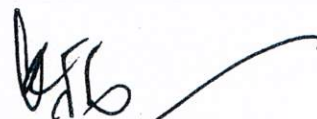
(Shri S. K. Jha)
Manager
Manager
D.A.V. Public School
Malighat, Muzaffarpur

(Issued with the approval of the competent authority and in accordance with DAV CMC guidelines.)


ABSTRACT OF COST OF CONSTRUCTION OF SHED IN REAR SIDE

Area of shed = 226'-9" X 15'-8" = 3568.84 Sft

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
SECTION-I (EARTH WORK/SAND FILLING)						
1	2.8	Earth work in excavation in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.				
	2.8.1	All kinds of soil	0.98	Cum		
2	2.28	Supplying and filling in plinth with local sand and under floors including, watering, ramming consolidating and dressing complete.	0.16	Cum		
SECTION-II (R.C.C./P.C.C. WORK)						
3	4.1 4.1.3	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering - all work upto plinth level. 1:2:4 (1 cement, 2 coarse sand, 4 graded stone aggregate 20mm nominal size)	0.16	Cum		
SECTION-III (STEEL WORK)						
4	10.2	Structural steel work riveted or bolted in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.	2400	Kg		
SECTION-IV (ROOFING WORK)						
5	12.1	Providing corrugated G.S.sheet roofing fixed with G.I.J. or hooks, bolts and nuts 8mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead and including a coat of approved steel primer and two coats of approved paint on overlapping of sheets complete up to a pitch of 60° excluding the cost of purlins, rafters and trusses.				
	12.1.3	0.50 mm thick with zinc coating not less than 275 gm/sqm	395.18	Sqm		
SECTION-V (FINISHING WORK)						
6	13.81 13.81.4	Applying priming coat: With ready mixed zinc chromate yellow primer of approved brand and manufacture on steel galvanised iron/steel works (second coat)	250.00	Sqm		


Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
7	13.82 13.82.1	Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade. New steel work (Two or more coats)	250.00	Sqm		
SECTION-VI (MISCELLANEOUS WORK)						
8	12.78 17.78.2	Providing and fixing on wall face unplasticised-PVC (working pressure 4 kgf per sqm) rain water pipes, soil, waste and vent pipe conforming to IS:4985 including jointing with seal ring conforming to IS:5382 leaving 10 mm gap for thermal expansion. 110 mm diameter	33.54	RM		
9	12.79 12.79.1.2	Providing and fixing on wall face unplasticised-PVC molded fittings/accessories for unplasticised-PVC rain water pipe, soil, waste and vent pipes conforming to IS:4985 including jointing with seal ring conforming to IS: 5382 leaving 10 mm gap for thermal expansion. Coupler 110 mm	11	Each		
10	12.80 12.80.2	Providing and fixing unplasticised-PVC pipe clip of approved design to unplasticised-PVC rain water pipe soil, waste and vent pipe by means of 50x50x50 mm hard wood plug screwed with M.S.screws of required length including cutting brick work and fixing on cement mortar 1:4 (1 cement: 4 coarse sand) and making good the wall etc. complete. 110 mm	33	Each		
11	MR	Miscellaneous expenses during construction, dismantling, packing, scaffoldings etc. complete as per direction of Engineer-in-Charge.	LS			
TOTAL						
Add 6% extra for external and internal Electrical and PHE work etc. Complete.						
TOTAL						
ROUNDING OFF						
Cost of construction per R.Ft.						

CEMENT - LAFARGE/BANGUR/PRISM/ACC
 STONE - PAKUR/KARWANDIA
 SAND - GANGA/SONEBATENE
 MSTEEL - TATA/JINDAL/SAIL
 PAINT - ASIAN/BERGER/NEKOL/ACK




C (12"x12"x18")
 M.S. COLUMN FOOTING DETAILS
 AREA OF SHEED = 3568.84 SFT.

0.50 MM G.I. TATA SHEET OVER 70X70X3 MM & 50X25X2.5MM.
 M.S. PIPE FRAME FIXED WITH J HOOK AND WASHERS AND
 WILL BE RESTING ON 100X100X3MM COLLUMNS IN ONE SIDE
 AND OTHER SIDE WILL BE FIXED IN WALL. FRAMES WILL BE
 FIXED IN WALL AND COLLUMNS PROPERLY. COLLUMNS WILL
 BE FIXED INSIDE F.C.C. 1:2:4 12"x12"x18" IN GROUND. RAIN
 WATER WILL BE COLLECTED IN CHANNEEL TOWARDS
 COMPOUND SIDE AND WILL BE BROUGHT UP TO GROUND
 BY PVC 4" DIA PIPES.

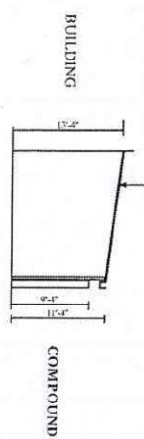

226'-9"

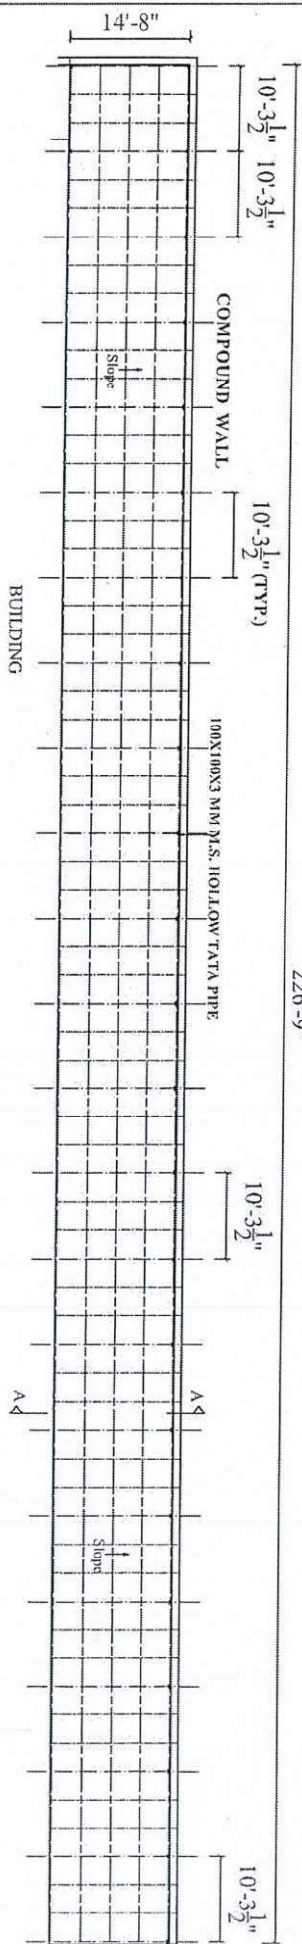

GROUND FLOOR PLAN

PROJECT

SHEET. NO-01	DATE	archgroup
TITLE	APR-26	architects, engineers, interior designers, 507(A), VASTU VIHAR, PH-6, AIMS-1, NH-139, NAULI, ATPUR ROAD, BHILKAJI, A DANABADI